


Show all work for full credit

Practice Exam

calculate the moment of Inertia about the centroidal x - and the centroidal y -axes for the shape shown

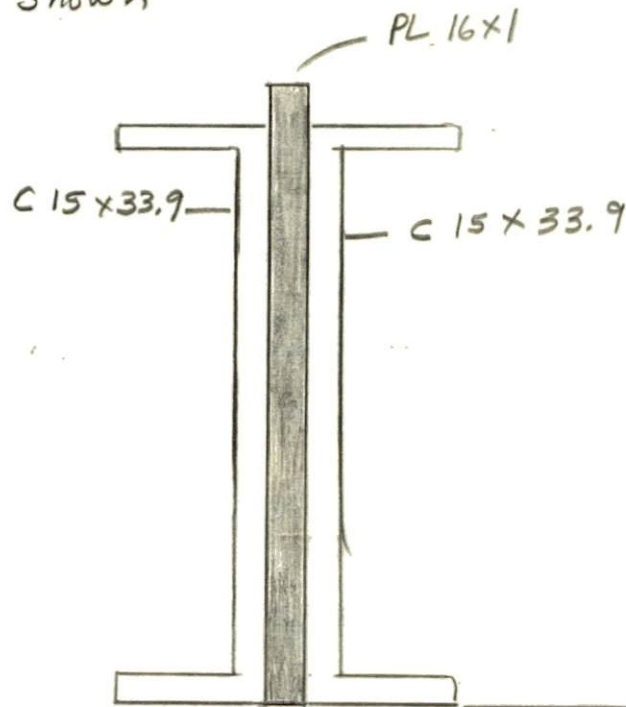



solution. Find \bar{y} , \bar{I}_x

Part	Area (in. ²)	y (in.)	Ay (in. ³)	$\bar{y}-y$ (in.)	$A(\bar{y}-y)^2$ in. ⁴	I_x total

Find \bar{I}_y (Parallel-axis Theorem)


Part	Area (in. ²)	d (in.)	Ad ²	I_y total	$\bar{I}_y = \Sigma [Ad^2 + I_y]$
PL 16x1					
C 15x33.9					
C 15x33.9					
Total					

The plates shown are subjected to an applied load $P = 15 \text{ kip}$. The connection is made using four $\frac{1}{2}$ in. diameter bolts. Calculate the shear stress that must be developed in the bolts to keep the connection together.

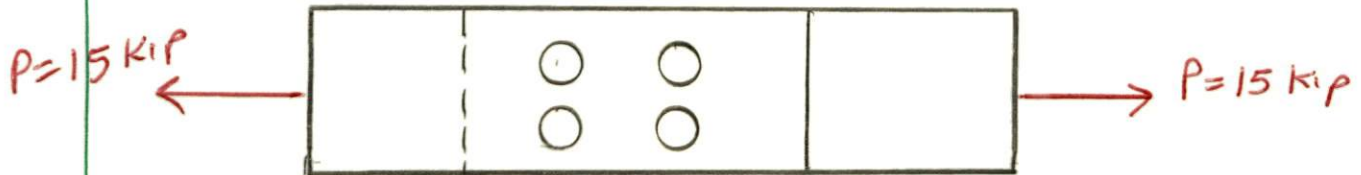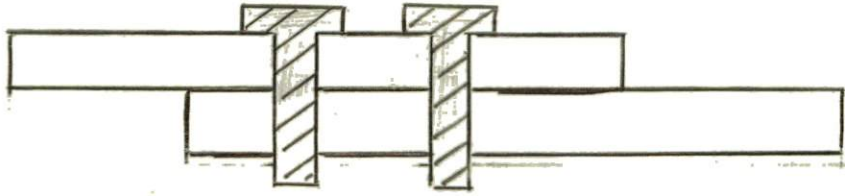


Solution.

Determine the axial compressive load that would cause a 6 in. x 12 in. (6 in. diameter and 12 in. length) medium strength concrete cylinder to deform 0.001 in.

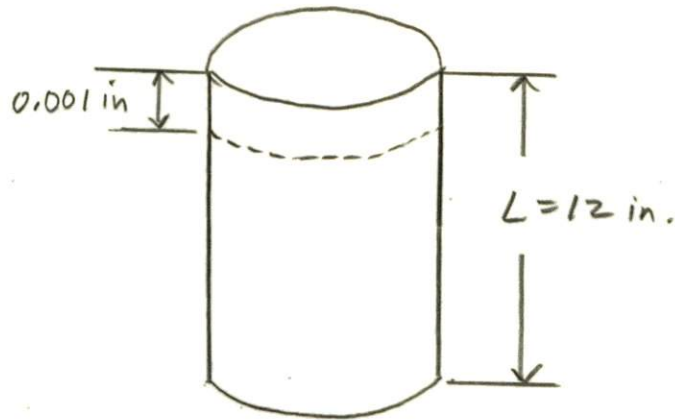

Solution.

A platform weighs 22,481 lb and is supported by four circular steel cables with an equal amount of load being carried by each. Determine the minimum diameter of the cables, such that the deformation does not exceed 0.3937 in. The cables are 16.5 ft long. $E_{\text{Steel}} = 30 \times 10^3 \text{ ksi}$
(Find d to the nearest sixteenth of an inch)

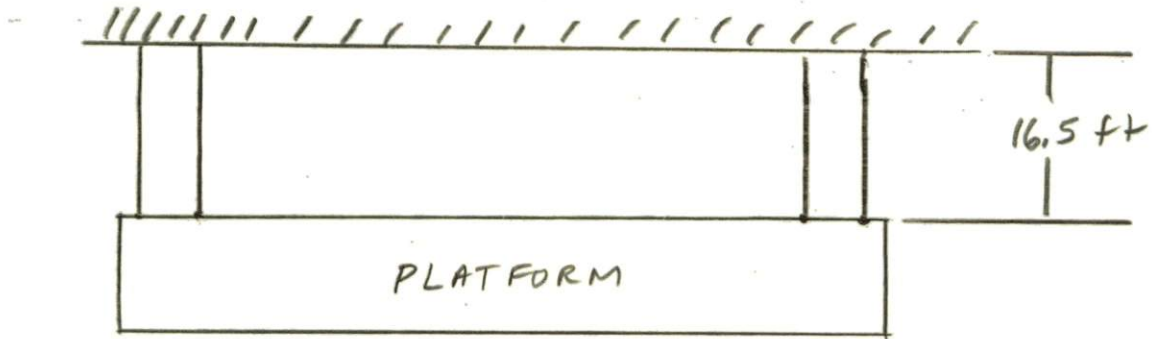

Solution.